

Series 010

Load capacity up to 20 kg/pair

Partial extension, Cross section 10,0 x 27,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

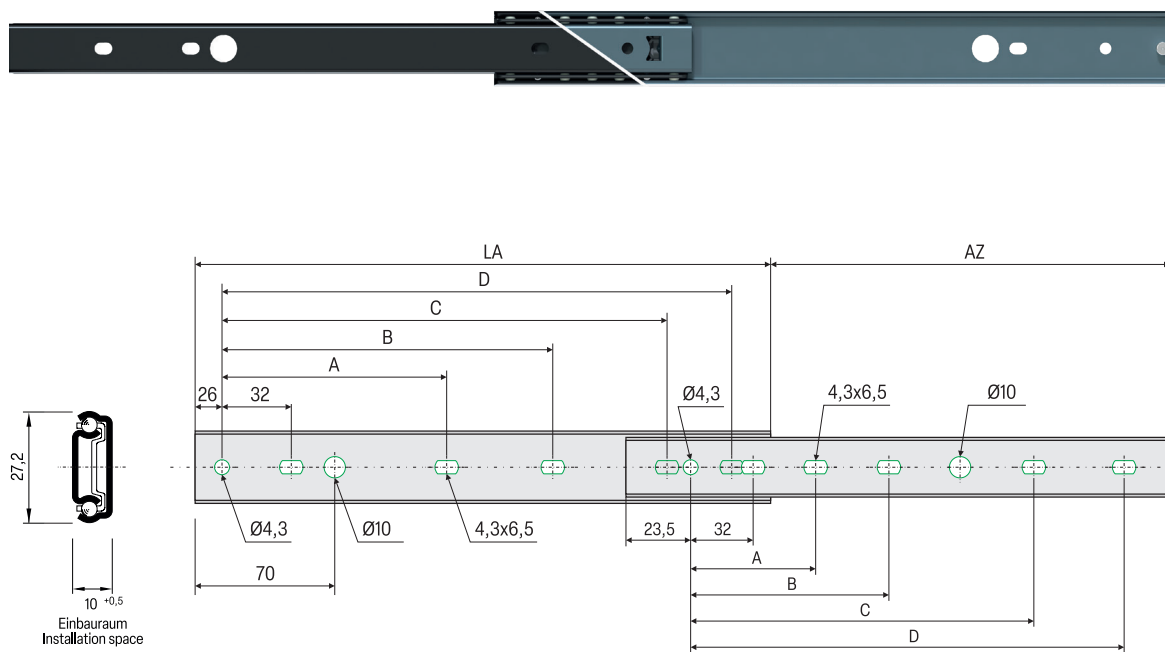

Attention:
Soft end stop - extension travel = + 10m

Function: Hold-in, Hold-out, Air Motion®

Article no. Model 1, ZM100	Article no. Model 2, RAL7016	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	Weight kg/piece
20100250280	20100250285	15	250	168	-	-	160	192	0,18
20100300280	20100300285	18	300	198	128	-	224	256	0,20
20100350280	20100350285	20	350	248	128	-	256	288	0,23
20100400280	20100400285	20	400	278	160	192	320	352	0,26
20100450280	20100450285	20	450	308	160	192	368	400	0,30
20100500280	20100500285	18	500	358	192	224	416	448	0,32