

Series 012

Load capacity up to 50 kg/pair

Partial extension, Cross section 13,0 x 37,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2


ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

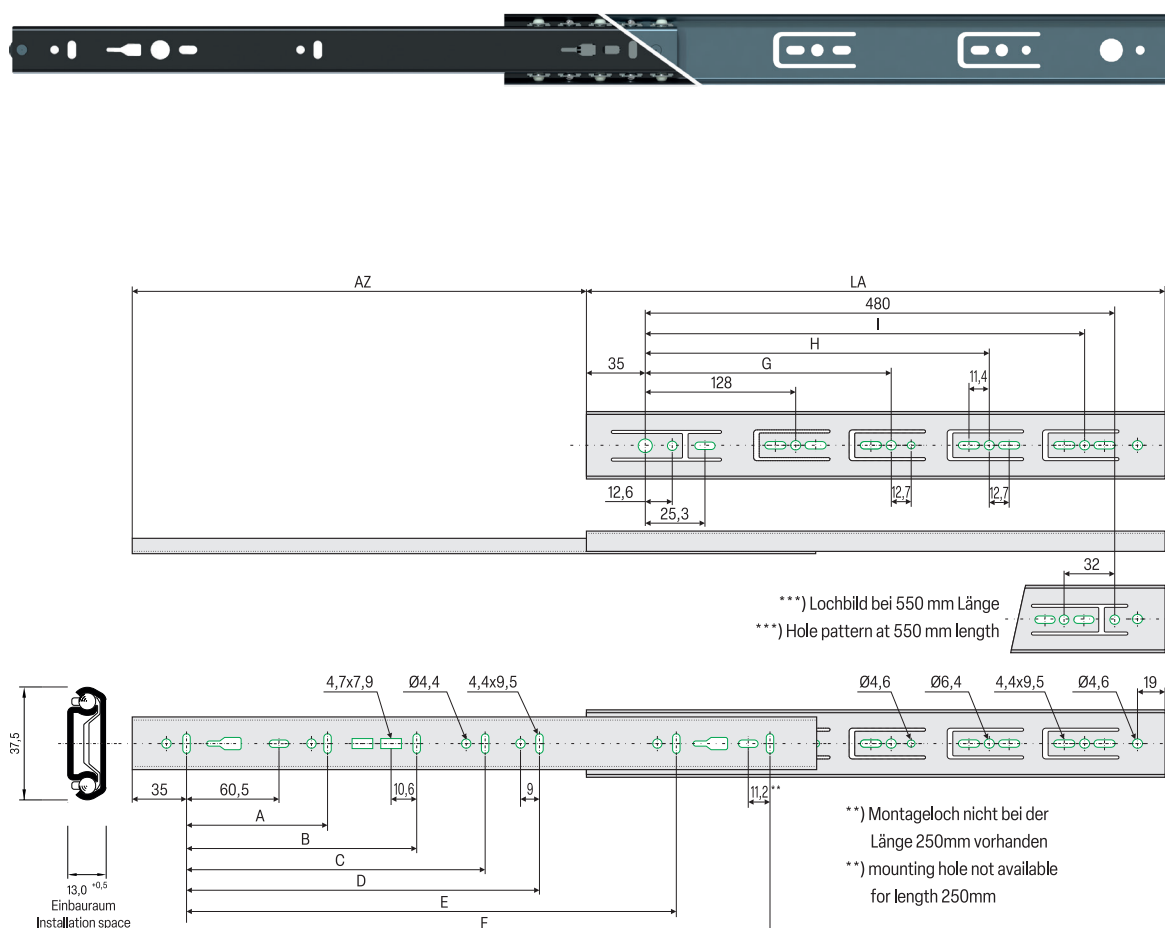

Function: Hold-in, Air Motion®

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20120250250	20120250255	50	250	163	96	-	-	-	-	192	-	-	-	0,22
20120300250	20120300255	50	300	205	96	-	-	-	-	242	224	-	-	0,26
20120350250	20120350255	50	350	260	128	-	-	-	-	292	224	-	-	0,32
20120400250	20120400255	50	400	281	128	-	-	-	-	342	224	-	320	0,36
20120450250	20120450255	48	450	331	128	224	-	-	-	392	224	-	352	0,39
20120500250	20120500255	45	500	376	128	224	-	-	-	442	224	-	416	0,44
20120550250	20120550255	42	550	415	128	224	320	-	-	492	224	352	***	0,49
20120600250	20120600255	40	600	451	128	224	320	-	-	542	224	352	480	0,53
20120650250	20120650255	37	650	488	128	224	320	416	544	592	224	352	544	0,58
20120700250	20120700255	35	700	526	128	224	288	416	-	642	224	352	544	0,64