

Series 016

Load capacity up to 50 kg/pair

Partial extension, Cross section 9,5 x 35,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

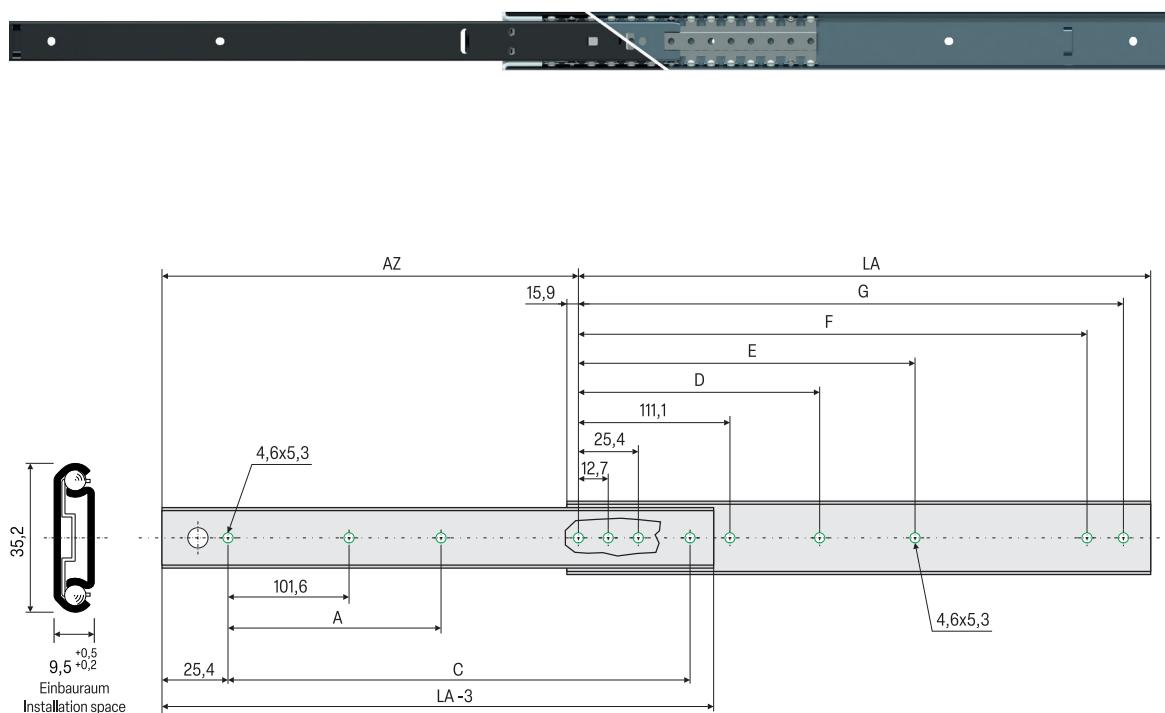

Function: Lock-out, Disconnect

Article no.	Article no.	TK / kg	LA	AZ	A	C	D	E	F	G	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20160305790	20160305795	50	305	196	-	254	-	149	260	273	0,32
20160356790	20160356795	50	356	247	-	305	-	200	311	324	0,37
20160406790	20160406795	45	406	247	-	356	-	251	362	375	0,42
20160457790	20160457795	45	457	328	203	406	213	302	413	425	0,47
20160508790	20160508795	40	508	379	229	457	238	352	464	476	0,49
20160559790	20160559795	40	559	405	254	508	264	403	514	527	0,54
20160610790	20160610795	35	610	429	279	559	289	454	565	578	0,59
20160660790	20160660795	30	660	481	305	610	314	505	616	629	0,63
20160711790	20160711795	30	711	506	330	660	340	556	667	679	0,72