

Series 036

Load capacity up to 75 kg/pair

Over extension, Cross section 13,0 x 52,6 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2


ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

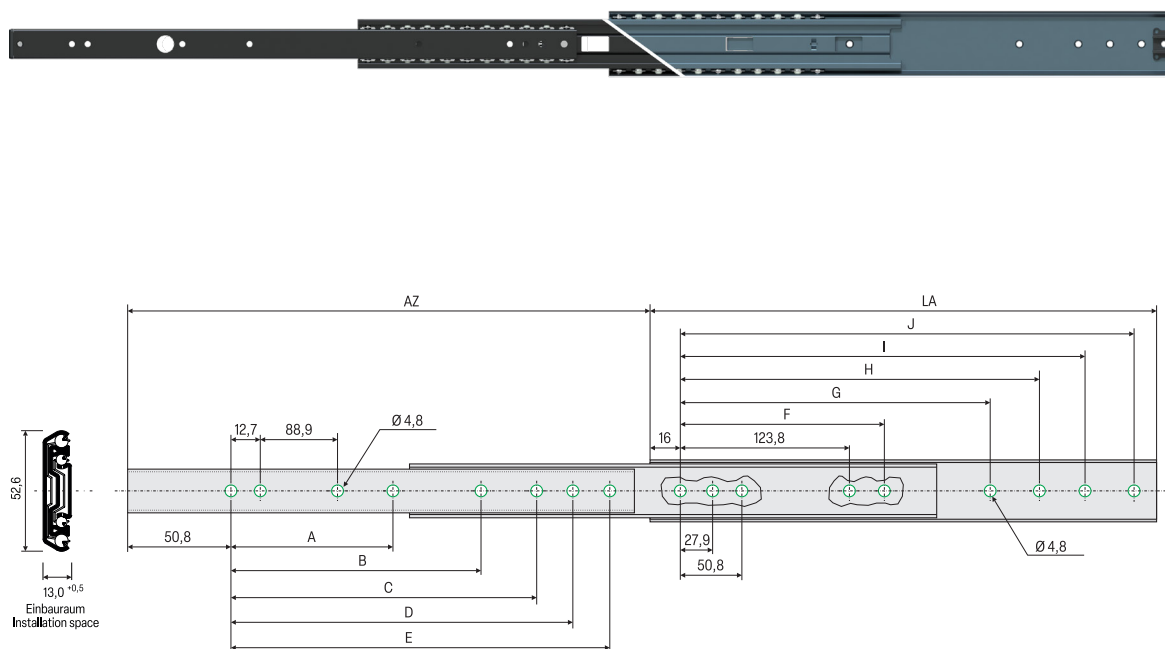

Function: Hold-in, Hold-out

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	J	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20360305220	20360305225	75	305	330	-	-	200,1	212,8	225,5	-	-	209,5	234,9	260,3	0,66
20360356220	20360356225	74	356	381	-	-	250,9	263,6	276,3	-	-	260,3	285,7	311,1	0,77
20360406220	20360406225	74	406	432	-	-	301,7	314,4	327,1	-	-	311,1	336,5	361,9	0,88
20360457220	20360457225	73	457	483	143,0	279,4	352,5	365,2	377,9	177,8	314,4	361,9	387,3	412,7	0,98
20360508220	20360508225	73	508	533	168,4	330,2	403,3	416,0	428,7	203,2	365,2	412,7	438,1	463,5	1,10
20360559220	20360559225	70	559	584	193,8	381,0	454,1	466,8	479,5	228,6	416,0	463,5	488,9	514,3	1,19
20360610220	20360610225	67	610	635	219,2	431,8	504,9	517,6	530,3	254	466,8	514,3	539,7	565,1	1,32
20360660220	20360660225	64	660	686	244,6	482,6	555,7	568,4	581,1	279,4	517,6	565,1	590,5	615,9	1,43
20360711220	20360711225	61	711	737	270,0	533,4	606,5	619,2	631,9	304,8	568,4	615,9	641,3	666,7	1,53