

Series 036

Load capacity up to 45 kg/pair

Over extension, Cross section 13,0 x 52,6 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

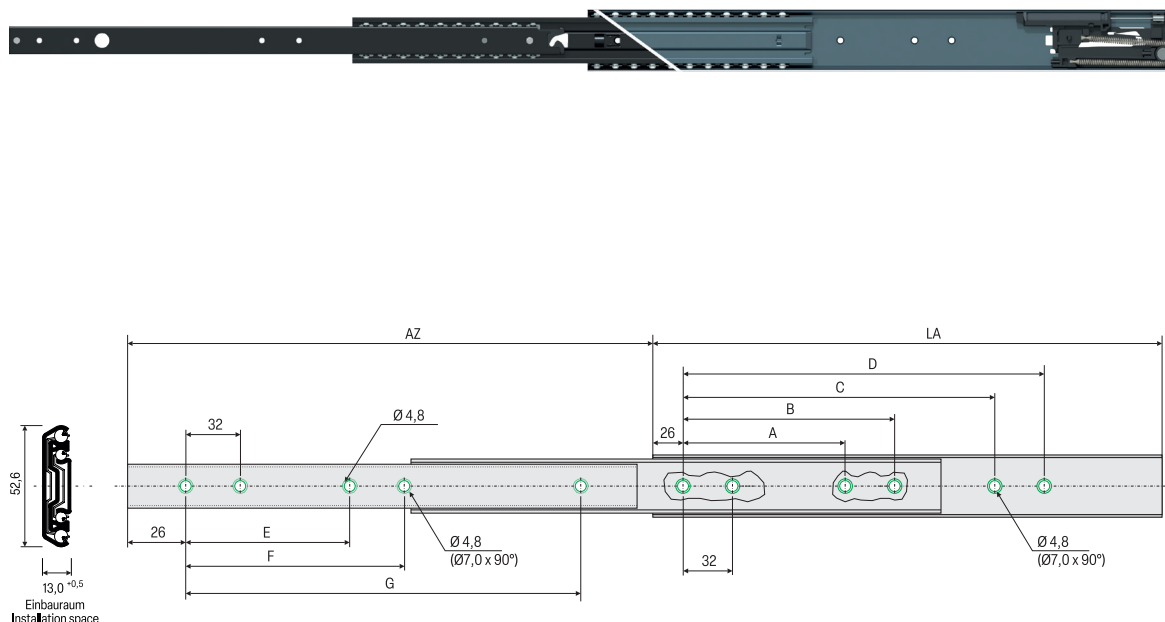

Function: Soft-close, Hold-out

Article no. Model 1, ZM100	Article no. Model 2, RAL7016	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg/piece
20360406660	20360406665	45	406	400	160	192	-	-	128	160	288	0,80
20360457660	20360457665	43	457	449	192	224	-	-	160	192	320	0,93
20360508660	20360508665	43	508	499	160	192	256	288	192	224	384	1,04
20360559660	20360559665	42	559	548	192	224	288	320	192	224	416	1,16
20360610660	20360610665	41	610	597	224	256	352	384	224	256	480	1,28
20360660660	20360660665	39	660	648	256	288	384	416	224	256	512	1,40
20360711660	20360711665	36	711	695	288	320	448	480	256	288	576	1,52