

Series 037

Load capacity up to 100 kg/pair

Over extension, Cross section 16,0 x 57,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

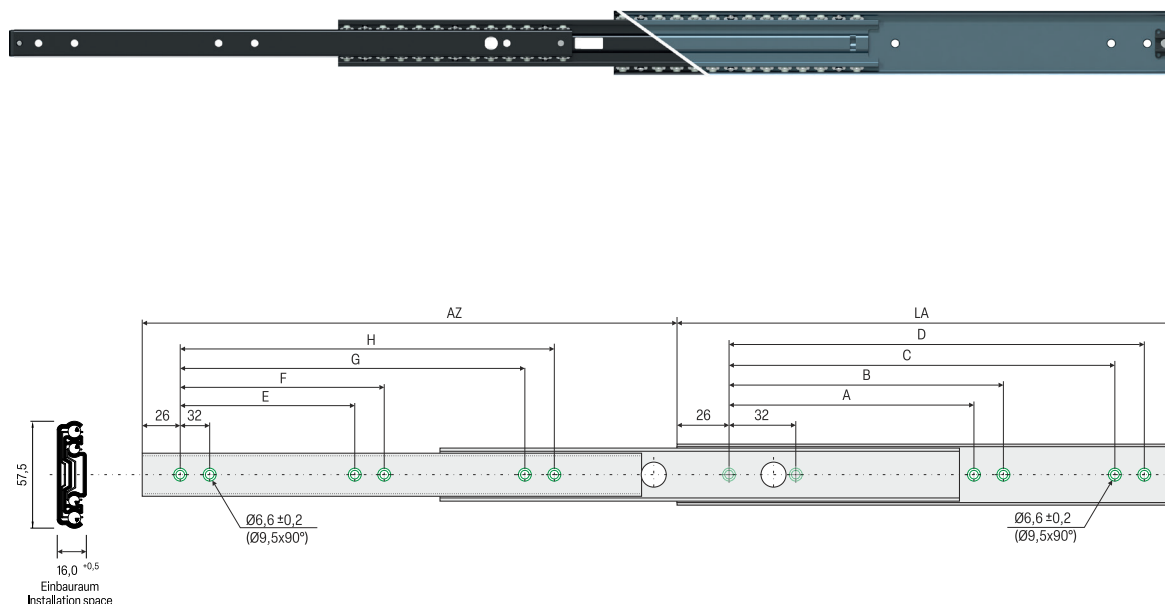

Function: Hold-in, Hold-out, Air Motion®

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20370300280	20370300285	89	300	340	-	-	218	250	-	-	-	252	0,82
20370350280	20370350285	89	350	389	-	-	218	250	-	-	-	252	0,97
20370400280	20370400285	91	400	438	160	192	218	350	128	160	-	352	1,11
20370450280	20370450285	93	450	487	160	192	320	352	128	160	320	352	1,27
20370500280	20370500285	100	500	537	192	224	416	448	160	192	-	416	1,41
20370550280	20370550285	100	550	586	224	-	448	480	160	192	-	448	1,56
20370600280	20370600285	93	600	635	256	288	480	512	192	224	480	512	1,71
20370650280	20370650285	91	650	684	288	320	544	576	192	256	-	544	1,84
20370700280	20370700285	86	700	733	288	416	576	608	256	288	576	608	2,00
20370750280	20370750285	84	750	784	288	512	608	640	256	320	-	701	2,13