

Series 037

Load capacity up to 60 kg/pair

Over extension, Cross section 16,0 x 57,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

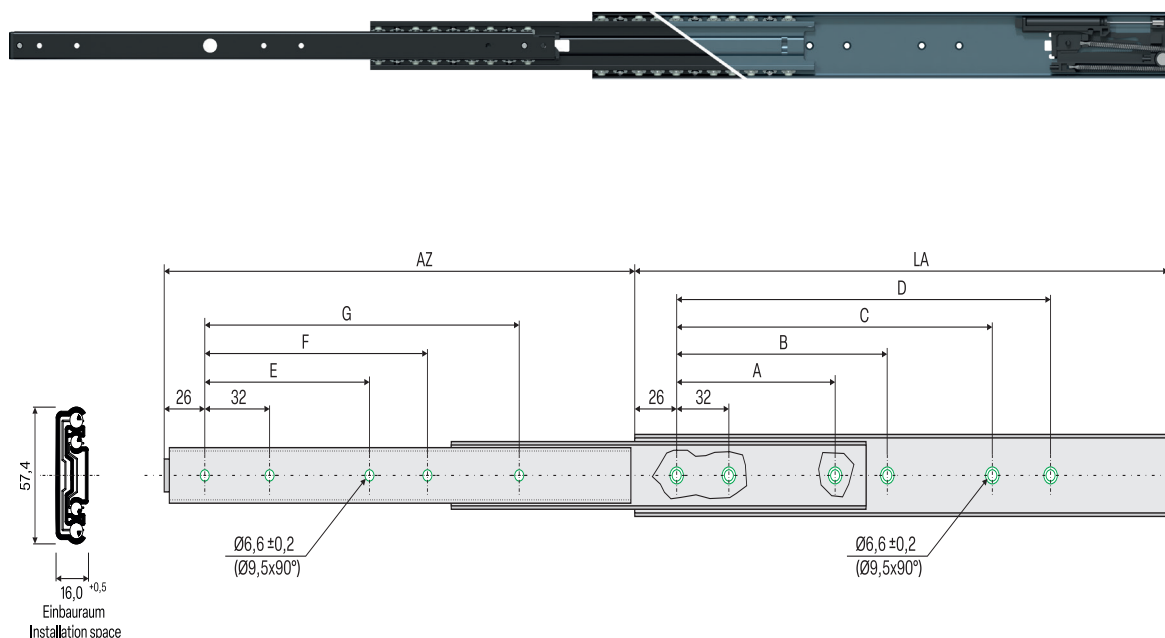

Function: Soft-close, Hold-out, Air Motion®

Article no. Model 1, ZM100	Article no. Model 2, RAL7016	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg/piece
20370400720	20370400725	50	400	400	160	192	-	-	128	160	288	1,11
20370450720	20370450725	50	450	449	192	224	-	-	160	192	320	1,27
20370500720	20370500725	55	500	499	160	192	256	288	192	224	384	1,41
20370550720	20370550725	55	550	548	192	224	288	320	192	224	416	1,56
20370600720	20370600725	55	600	597	224	256	352	384	224	256	480	1,71
20370650720	20370650725	58	650	648	256	288	384	416	224	256	512	1,86
20370700720	20370700725	60	700	695	288	320	448	480	256	288	576	2,00
20370750720	20370750725	60	750	748	320	352	480	512	256	288	626	2,20