

Series 038

Load capacity up to 100 kg/pair

Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2


ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

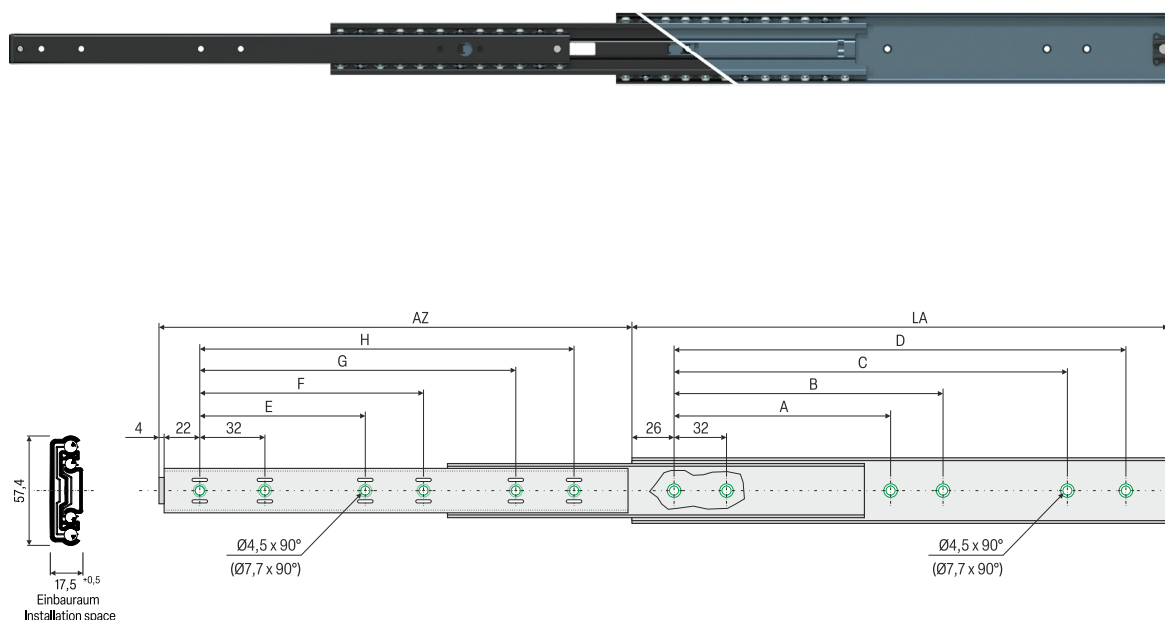

Function: Hold-in, Hold-out, Air Motion®

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20380300280	20380300285	89	300	340	-	-	218	250	-	-	-	252	0,66
20380350280	20380350285	89	350	389	-	-	218	250	-	-	-	252	0,77
20380400280	20380400285	91	400	438	160	192	318	350	128	160	-	352	0,88
20380450280	20380450285	93	450	487	160	192	320	352	128	160	320	352	0,98
20380500280	20380500285	100	500	537	192	224	416	448	160	192	-	416	1,10
20380550280	20380550285	100	550	586	224	-	448	480	160	192	-	448	1,19
20380600280	20380600285	93	600	635	256	288	480	512	192	224	480	512	1,32
20380650280	20380650285	91	650	684	288	320	544	576	192	256	-	544	1,43
20380700280	20380700285	86	700	733	288	416	576	608	256	288	576	608	1,53