

Load capacity up to 60 kg/pair

Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
-  Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

SCHOCK
TELESCOPIC SLIDES

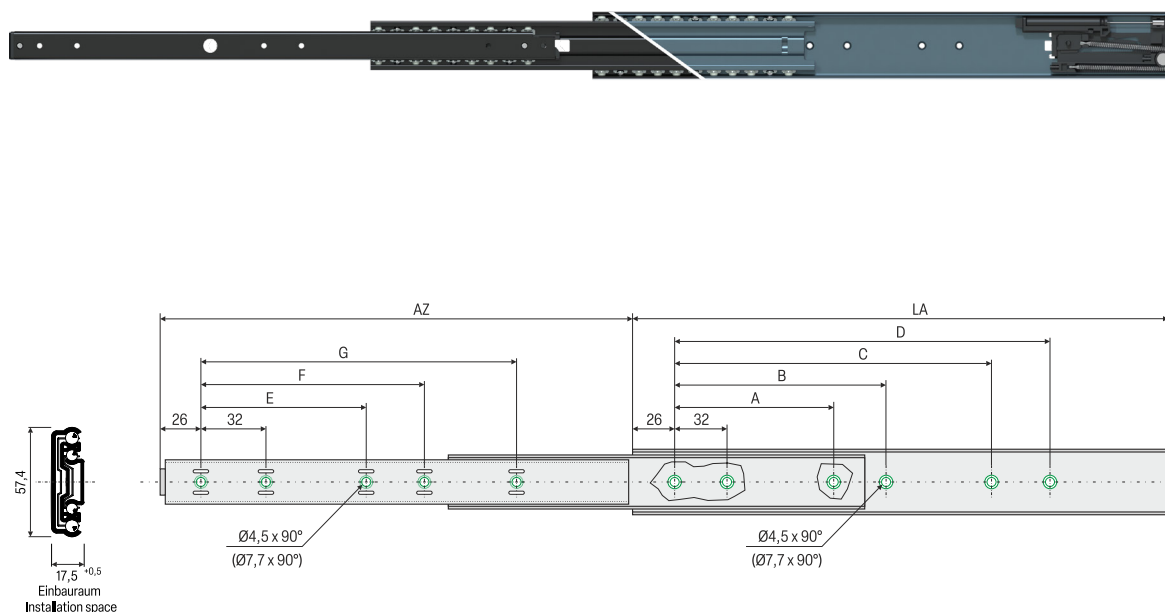

Function: Soft-close, Hold-out, Air Motion®

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20380400720	20380400725	49	400	400	160	192	-	-	128	160	288	1,11
20380450720	20380450725	49	450	449	192	224	-	-	160	192	320	1,27
20380500720	20380500725	55	500	499	160	192	256	288	192	224	384	1,41
20380550720	20380550725	55	550	548	192	224	288	320	192	224	416	1,56
20380600720	20380600725	55	600	597	224	256	352	384	224	256	480	1,71
20380650720	20380650725	58	650	648	256	288	384	416	224	256	512	1,87
20380700720	20380700725	60	700	695	288	320	448	480	256	288	576	2,00