

Series 039

Load capacity up to 155 kg/pair

Full extension, Cross section 19,0 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

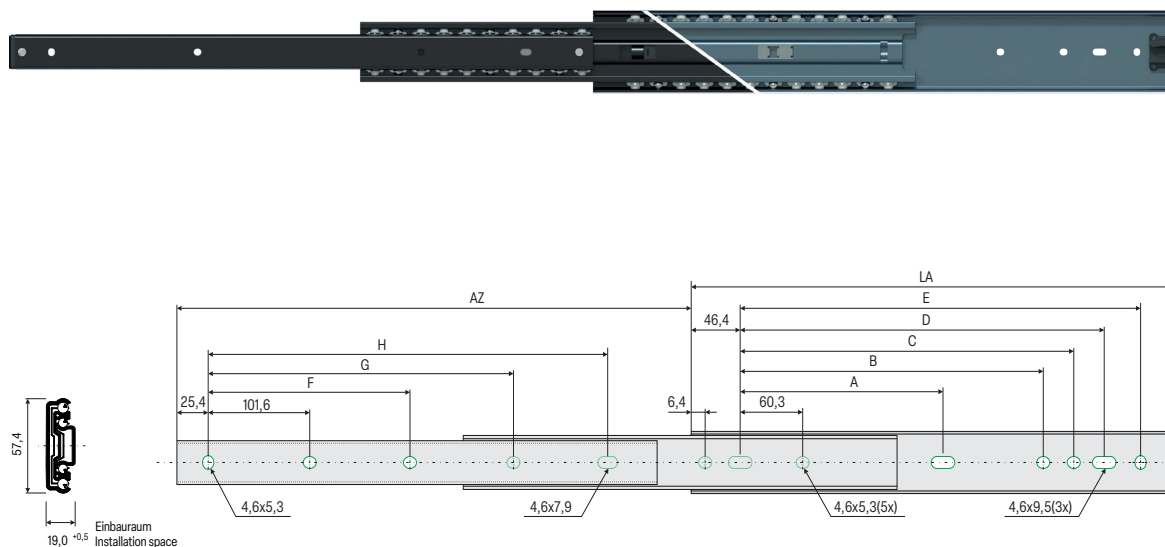

Function: Hold-in, Hold-out, Air Motion®

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20390305280	20390305285	98	305	305	-	135	179	205	230	-	-	229	0,90
20390356280	20390356285	98	356	356	-	186	230	255	281	-	-	279	1,04
20390406280	20390406285	111	406	406	-	237	281	306	332	-	257	330	1,25
20390457280	20390457285	121	457	457	-	288	332	357	382	-	308	381	1,36
20390508280	20390508285	155	508	508	216	339	382	408	433	203	359	432	1,51
20390559280	20390559285	121	559	559	241	389	433	459	484	229	410	483	1,68
20390610280	20390610285	111	610	610	267	440	484	509	535	254	461	533	1,82
20390660280	20390660285	102	660	660	292	491	535	560	586	279	511	584	1,98
20390711280	20390711285	90	711	711	318	542	586	611	636	305	562	635	2,11