

Series 040

Load capacity up to 30 kg/pair

Full extension, Cross section 20,0 x 27,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2


ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

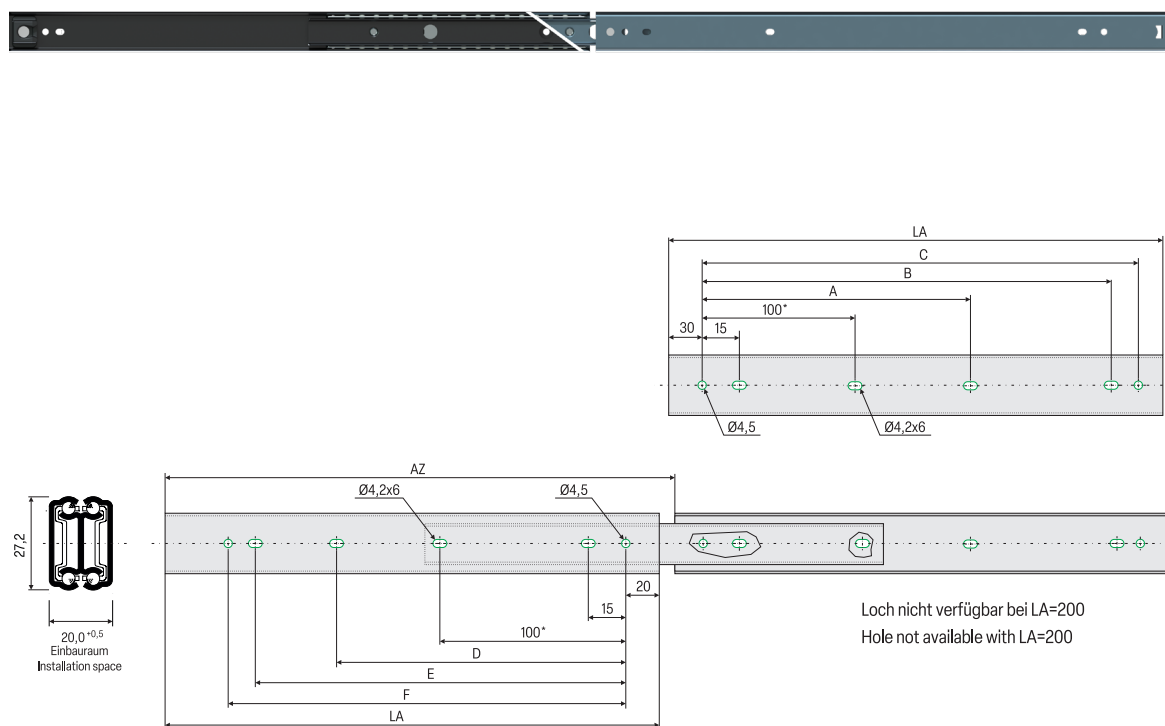

Function: Hold-in, Air Motion®

Article no.	Article no.	TK / kg	LA	AZ	A	C	D	E	F	G	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20400200250	20400200255	23	200	207	-	135	145	-	119	130	0,28
20400250250	20400250255	26	250	256	-	185	195	-	165	180	0,36
20400300250	20400300255	30	300	305	-	235	245	-	215	230	0,45
20400350250	20400350255	28	350	354	-	285	295	-	265	280	0,53
20400400250	20400400255	26	400	404	-	335	345	-	315	330	0,61
20400450250	20400450255	24	450	453	215	385	395	225	365	380	0,69
20400500250	20400500255	22	500	502	240	435	445	250	415	430	0,77