

Series 040

Load capacity up to 30 kg/pair

Full extension, Cross section 20,0 x 27,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length


AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

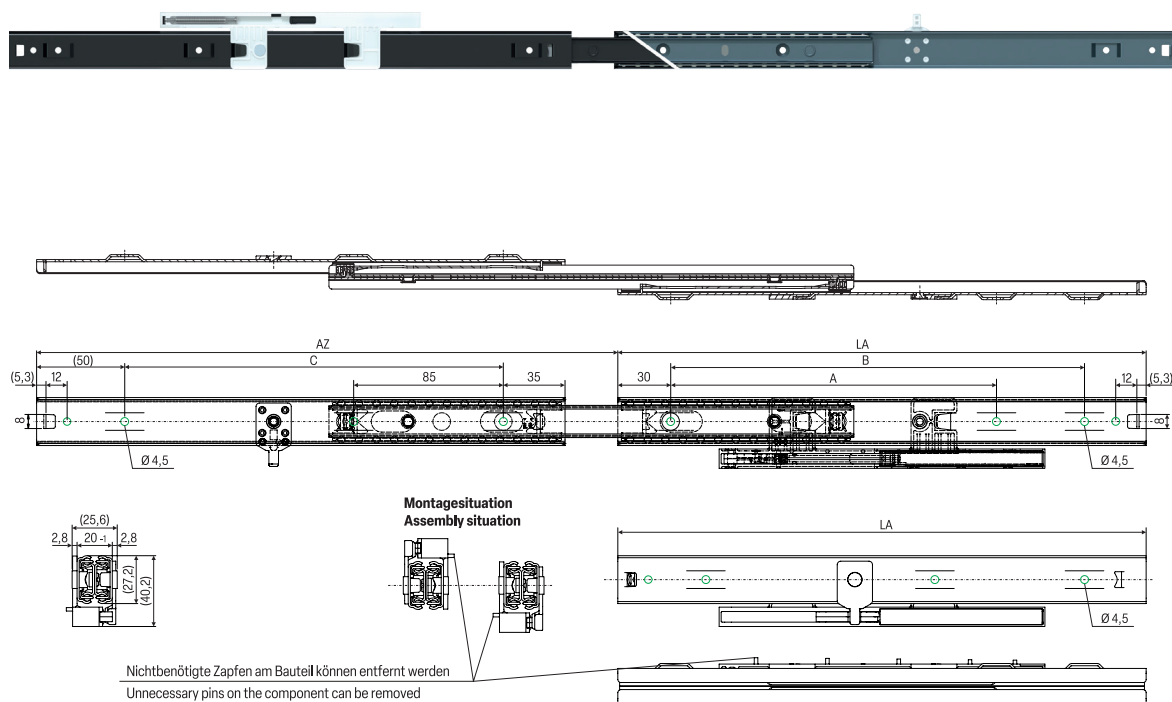

Function: Soft-close, Air Motion®

Article no.	Article no.		TK / kg	LA	AZ	A	B	C	Weight
Model 1, ZM100	Model 2, RAL7016		10.000	mm	mm	mm	mm	mm	kg/piece
20400300690	20400300695		30	300	330	185	235	215	0,45
20400350690	20400350695		28	350	380	210	285	265	0,53
20400400690	20400400695		26	400	430	235	335	315	0,61
20400450690	20400450695		24	450	470	260	385	365	0,69
20400500690	20400500695		22	500	530	285	435	415	0,77