

Series 070

Load capacity up to 160 kg/pair

Full extension, Cross section 19,0 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2


ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

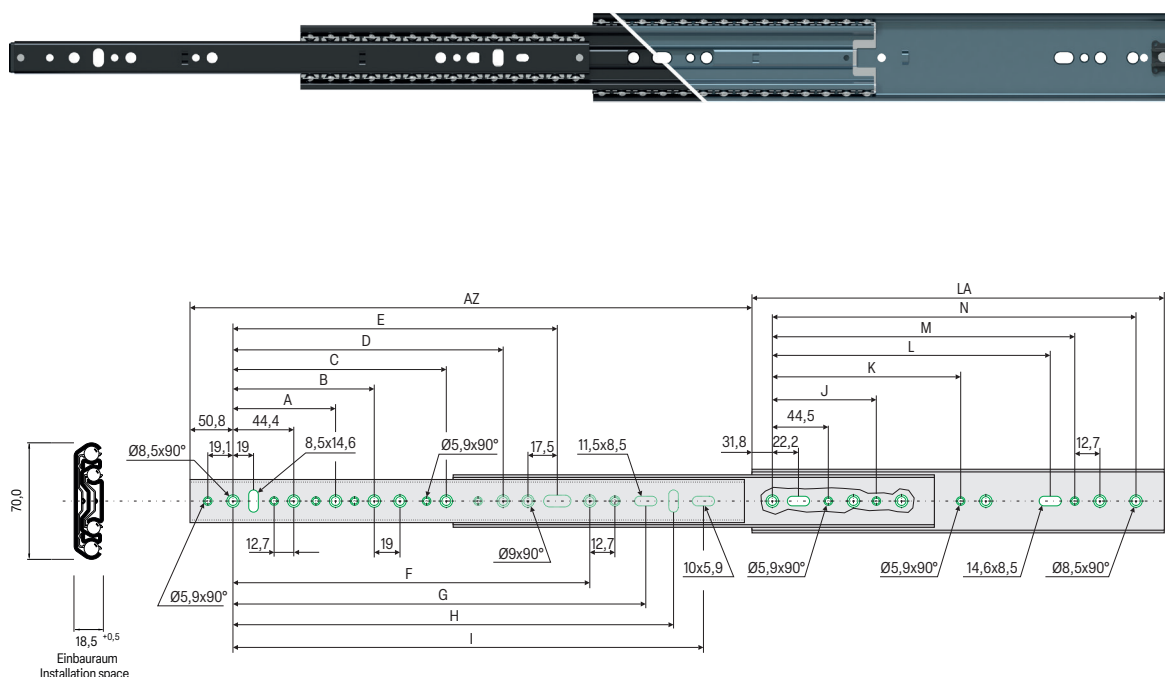

Function: Hold-in

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Weight
ZM100	RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20700305020	20700305025	140	305	305	-	-	-	-	-	-	-	179	199	-	-	184	200	238	1,19
20700356020	20700356025	140	356	356	-	-	-	-	-	-	-	230	249	-	-	235	251	289	1,40
20700406020	20700406025	150	406	406	108	-	-	-	-	237	262	281	300	-	-	286	302	340	1,60
20700457020	20700457025	150	457	457	108	-	-	-	-	287	313	332	351	-	-	337	353	391	1,81
20700508020	20700508025	160	508	508	108	172	-	-	-	338	364	383	402	-	-	387	403	442	2,02
20700559020	20700559025	160	559	559	108	172	-	-	329	389	414	433	453	-	-	438	454	492	2,21
20700610020	20700610025	160	610	610	108	172	-	-	380	440	465	484	503	-	-	489	505	543	2,42
20700660020	20700660025	160	660	660	108	172	-	-	430	491	516	535	554	-	-	540	556	594	2,64
20700711020	20700711025	160	711	711	108	172	-	-	481	541	567	586	605	-	-	591	607	645	2,94
20700762020	20700762025	160	762	762	108	172	-	-	532	592	618	637	656	203	470	641	657	696	3,03
20700813020	20700813025	160	813	813	108	172	-	-	583	643	668	687	707	203	521	692	708	746	3,24
20700864020	20700864025	160	864	864	108	172	349	-	634	694	719	738	757	203	572	743	759	797	3,44
20700914020	20700914025	160	914	914	108	172	349	502	684	745	770	789	808	203	622	794	810	848	3,65