

Load capacity up to 50 kg/pair

Full extension, Cross section 12,7 x 45,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
- Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

SCHOCK
TELESCOPIC SLIDES

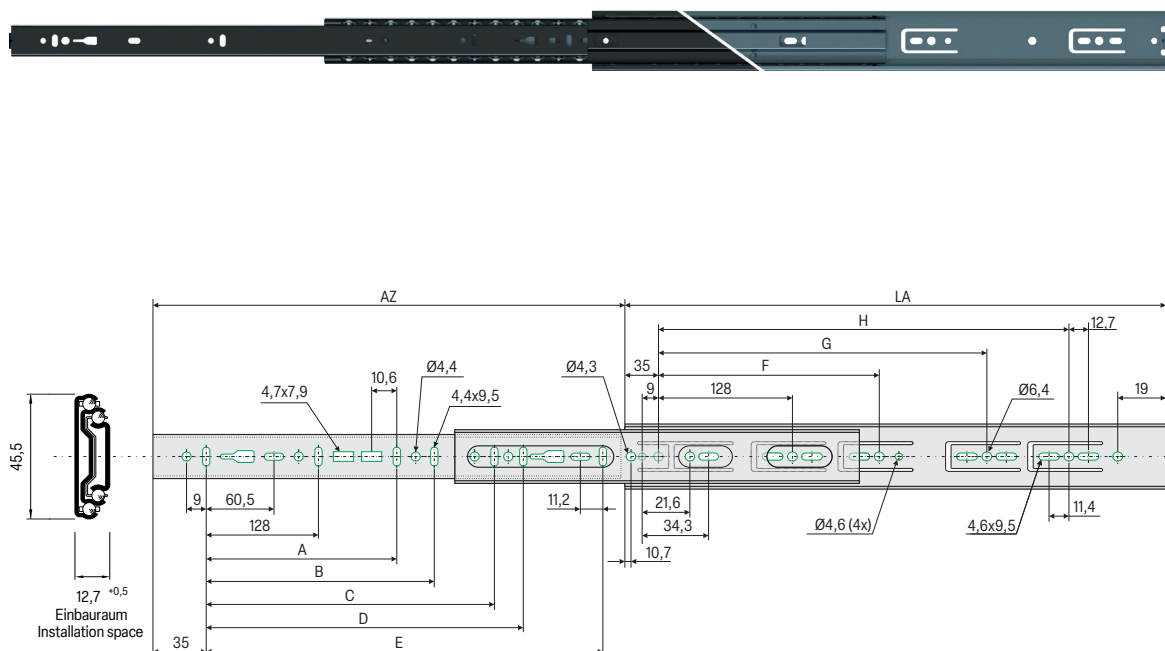

Function: Hold-in, Disconnect, Air Motion®

Article no.	Article no.	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	Model 2, RAL7016	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20720250300	20720250305	47	250	254	-	-	-	-	192	-	-	-	0,38
20720300300	20720300305	48	300	305	-	-	-	-	242	224	-	-	0,45
20720350300	20720350305	49	350	356	-	-	-	-	292	224	-	-	0,53
20720400300	20720400305	50	400	406	-	-	-	-	342	224	320	-	0,61
20720450300	20720450305	50	450	457	-	-	320	-	392	224	352	-	0,68
20720500300	20720500305	50	500	508	-	-	320	-	442	224	416	-	0,76
20720550300	20720550305	50	550	559	-	-	320	416	492	224	352	448	0,84
20720600300	20720600305	50	600	610	224	-	416	-	542	224	352	480	0,93
20720650300	20720650305	49	650	660	224	-	416	544	592	224	352	544	1,00
20720700300	20720700305	48	700	711	224	288	416	544	642	224	352	544	1,08