

Series 072

Load capacity up to 45 kg/pair

Full extension, Cross section 12,7 x 45,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2


ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

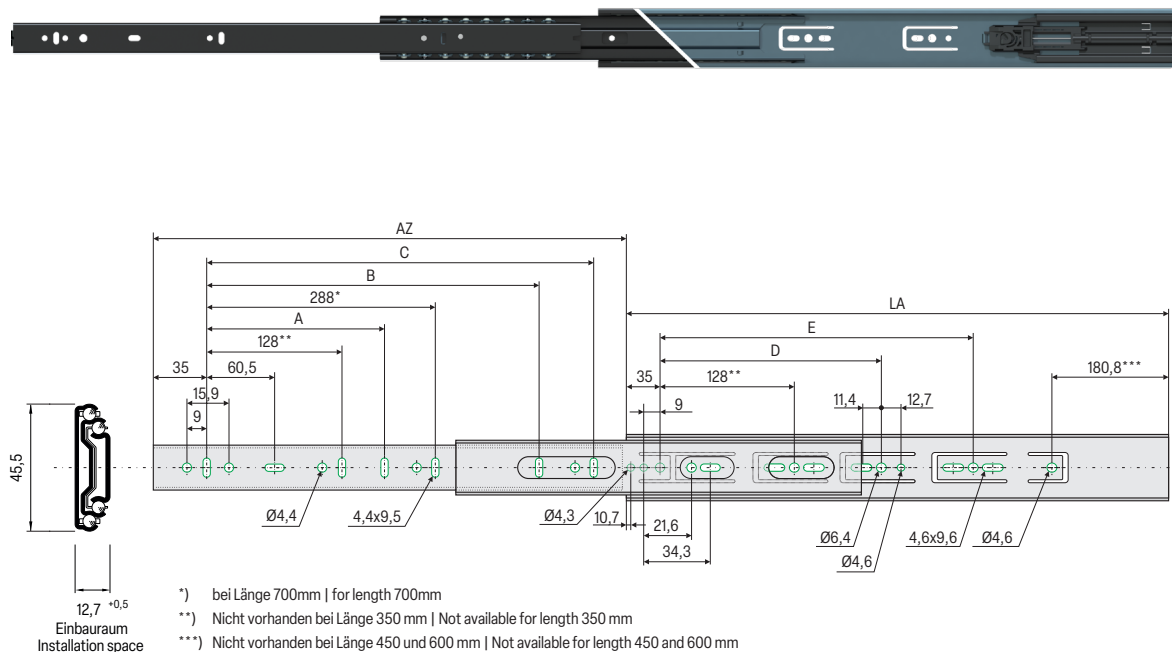

Function: Push-to-open, Disconnect, Air Motion®

Article no. Model 1, ZM100	Article no. Model 2, RAL7016	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	Weight kg/piece
20720350410	20720350415	43	350	310	-	203	-	-	-	0,80
20720400410	20720400415	44	400	406	-	250	-	-	-	0,93
20720450410	20720450415	45	450	457	-	300	-	224	-	1,04
20720500410	20720500415	45	500	508	-	352	-	224	-	1,16
20720550410	20720550415	45	550	559	-	400	352	224	-	1,28
20720600410	20720600415	45	600	610	224	-	416	224	352	1,40
20720650410	20720650415	44	650	660	224	-	416	224	352	1,52
20720700410	20720700415	43	700	711	224	-	544	224	352	1,63