
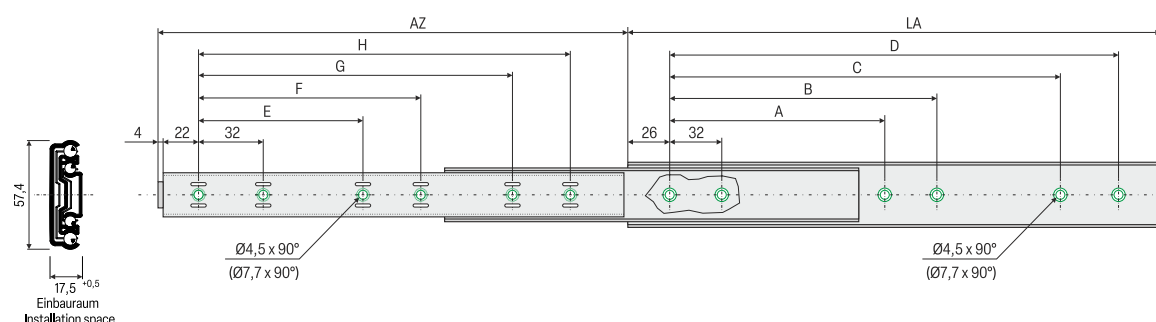


Load capacity up to 40 kg/pair

Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement

Aluminum
AlMg_{4,5}Mn



Notes:

LA = Length

AZ = Travel parth

TK = Load capacity at
10.000 Cycles

- Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

SCHOCK
TELESCOPIC SLIDES

Function: Hold-in, Hold-out, Air Motion®

Article no.	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg/piece
24380300280	37	300	340	-	-	218	250	-	-	-	252	0,26
24380350280	37	350	389	-	-	218	250	-	-	-	252	0,31
24380400280	38	400	438	160	192	318	350	128	160	-	352	0,35
24380450280	39	450	487	160	192	320	352	128	160	320	352	0,39
24380500280	40	500	537	192	224	416	448	160	192	-	416	0,44
24380550280	40	550	586	224	-	448	480	160	192	-	448	0,48
24380600280	39	600	635	256	288	480	512	192	224	480	512	0,53
24380650280	38	650	684	288	320	544	576	192	256	-	544	0,57
24380700280	37	700	733	288	416	576	608	256	288	576	608	0,61